

CHARNIÈRE INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH




Minimum de largeur utile : 85 mm pour une la distance
 Les valeurs de réglage s'appliquent à des portes sans réglage de B.

Distance Epaisseur de porte

Distance	85	90	107	110	115	120	125	130	135	140	145	150
0	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1
1	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1
2	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1
3	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1
4	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1
5	2,0	2,1	2,2	2,3	2,4	2,5	2,6	2,7	2,8	2,9	3,0	3,1


Tableau des dimensions de
Embossement de porte T
Distance D
et hauteur dimension B

Distance	14	17
14,0	160,0	170,0
14,5	165,0	175,0
15,0	170,0	180,0




CHARNIÈRE INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

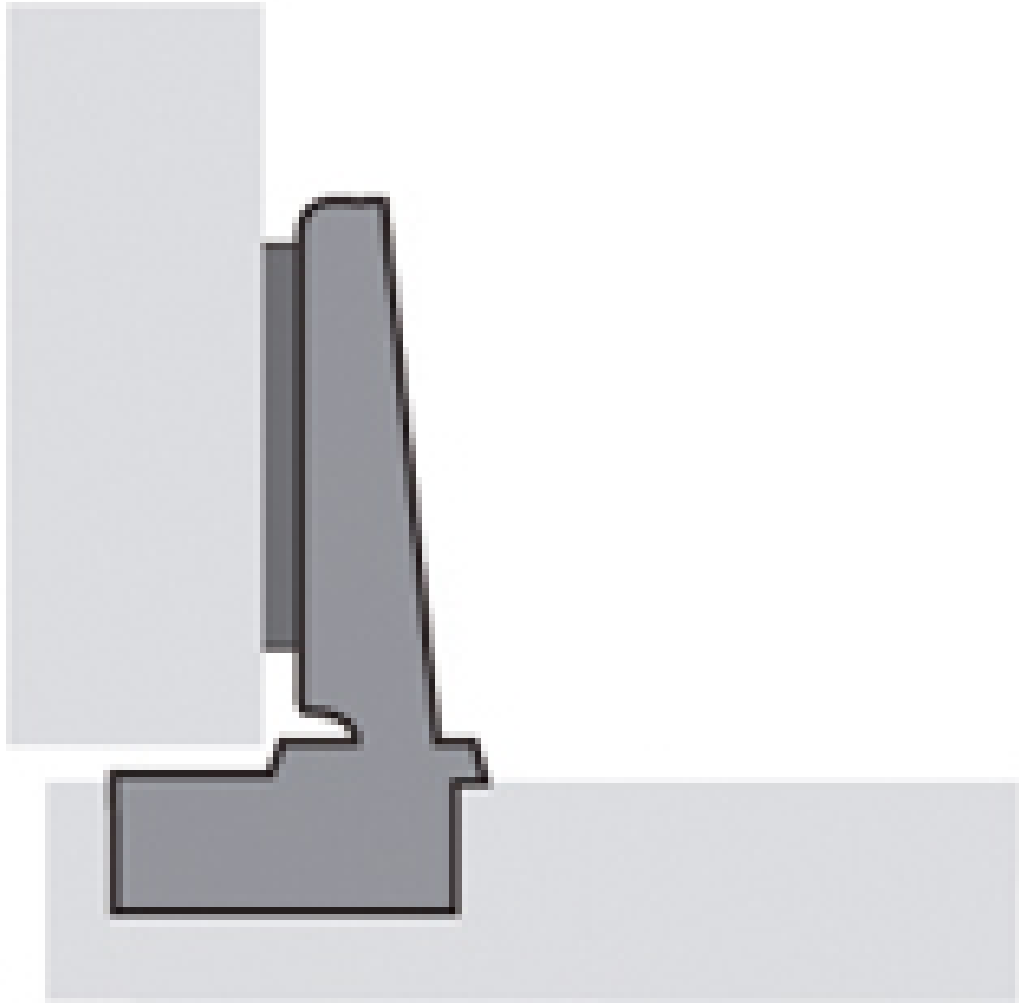


CHARNIÈRE INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

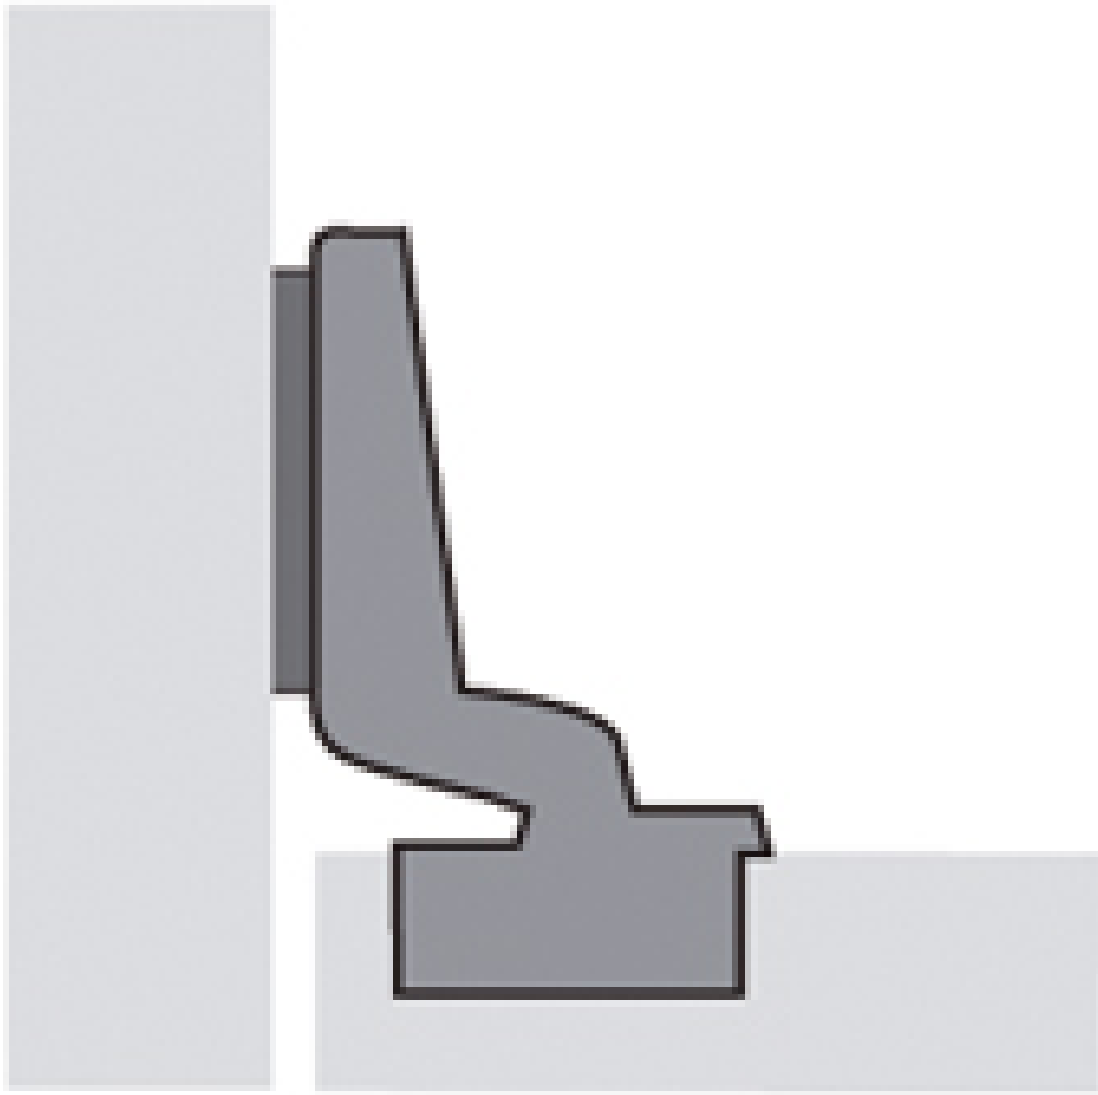

CHARNIÈRE INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

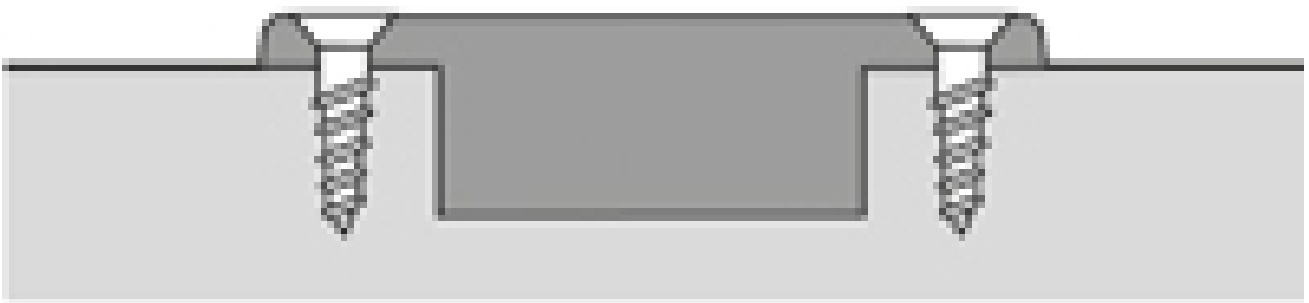

CHARNIÈRE INTERMAT 110° 9943 PUSH TO OPEN T 42

HETTICH

